

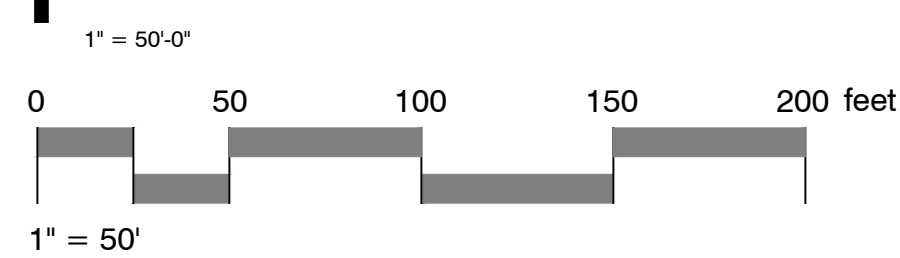




1 OVERALL LANDSCAPE PLAN




PLANT SCHEDULE

TREES	QTY	BOTANICAL / COMMON NAME	SIZE	CONTAINER	
	8	ACER FREEMANII `AUTUMN BLAZE` / AUTUMN BLAZE MAPLE	2" CAL.	POT	
	6	ACER SACCHARUM / SUGAR MAPLE	2" CAL.	POT	
	13	AESCULUS GLABRA `JN SELECT` TM / EARLY GLOW BUCKEYE	2" CAL.	POT	
	4	AMELANCHIER X GRANDIFLORA `AUTUMN BRILLIANCE` / AUTUMN BRILLIANCE SERVICEBERRY	25 GAL.	POT	
	4	BETULA NIGRA / RIVER BIRCH	2" CAL.	POT	
	8	GLEDITSIA TRIACANTHOS `SKYLINE` / SKYLINE HONEY LOCUST	2" CAL.	POT	
	5	TILIA AMERICANA `MCKSENTRY` / AMERICAN SENTRY LINDEN	2" CAL.	POT	
	7	TILIA CORDATA `GREENSPIRE` / GREENSPIRE LINDEN	2" CAL.	POT	
	6	ULMUS AMERICANA `VALLEY FORGE` / AMERICAN ELM	2" CAL.	POT	
SHRUBS	QTY	BOTANICAL / COMMON NAME	SIZE	CONTAINER	SPACING
	17	CORNUS SERICEA `ARCTIC FIRE` / ARCTIC FIRE DOGWOOD	3 GAL.	POT	72" o.c.
	32	HEMEROCALLIS X `STELLA DE ORO` / STELLA DE ORO DAYLILY	3 GAL.	POT	24" o.c.
	24	LEUCANTHEMUM X SUPERBUM `SNOWCAP` / SNOWCAP SHASTA DAISY	3 GAL.	POT	30" o.c.
	21	VIBURNUM DENTATUM `AUTUMN JAZZ` / ARROWWOOD VIBURNUM	3 GAL.	POT	120" o.c.

LANDSCAPE NOTES

1. TREE SPACING TO BE 50' ON CENTER (MAX. TREE SPACING TO BE 100' ON CENTER WHEN TAKING INTO ACCOUNT HARDSCAPE)
2. TREES NOT TO BE PLANTED WITHIN 50' FROM INTERSECTIONS TO ENSURE VISION OF VEHICULAR & PEDESTRIAN TRAFFIC
3. TREES NOT TO BE PLANTED WITHIN 10' FROM DRIVEWAYS OR FIRE HYDRANTS, CONTRACTOR TO CONFIRM TREE LOCATIONS IN FIELD.
4. TREES NOT TO BE PLANTED WITHIN 5' OF BURIED OR OVERHEAD UTILITIES, CONTRACTOR TO CONFIRM TREE LOCATIONS IN FIELD.
5. CONTRACTOR TO FIELD VERIFY ALL PLANT & MATERIAL QUANTITIES TO MEET INTENT OF DRAWING. PLANT / REFERENCE NOTES SCHEDULE ARE GUIDES FOR PLANNING PURPOSES.

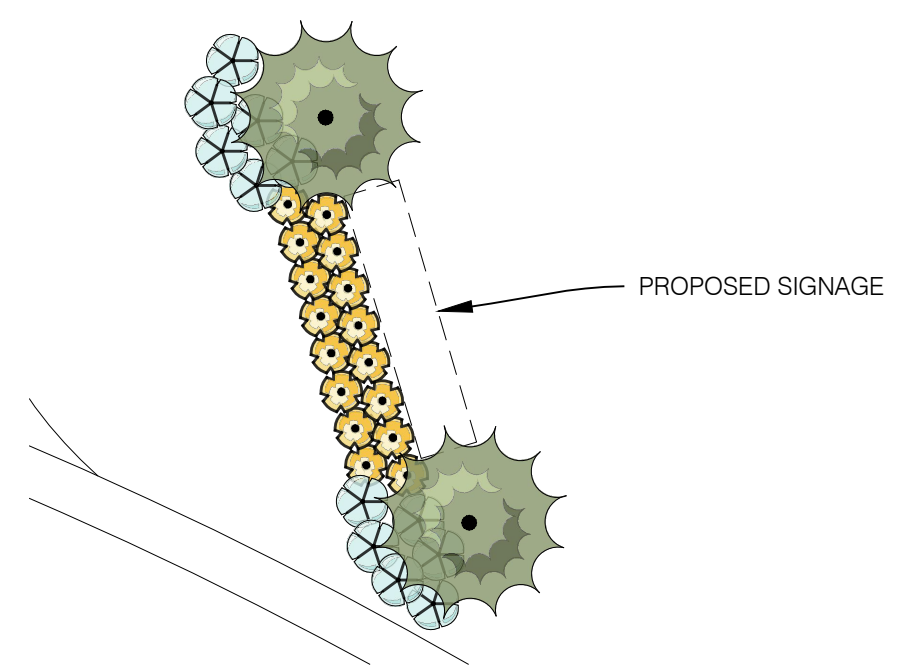

2 TYPICAL PLANTING AT SIGNAGE

